

DIGIFLEX® DIGITAL SERVO DRIVES WITH CANopen INTERFACE MODEL: DC201R30A80LAC

FEATURES:

- Fully digital, state-of-the-art DSP design
- Brushed DC, brushless AC drive technology
- 10 kHz digital current loop, 5 kHz digital velocity loop, 5 kHz digital position loop with programmable gain settings
- Encoder and Hall sensor feedback for sinusoidal commutation
- Surface-mount technology
- Small size, low cost, ease of use

- Isolated CAN bus interface for setup and networking
- Supports CANopen communication protocol (DS301) and Device Profile for Drives and Motion Control commands (DSP-402)
- CAN bus address and bit rate selection via DIP-switches
- Windows® based DigiFlex® DriveWare setup software via CAN interface (operates with third party PC-to-CAN interface)
- Operates in torque, velocity or position mode


- Single resolver input
- 3 programmable isolated digital inputs (sinking), sourcing inputs optional (-SRC).
- 3 programmable isolated digital outputs (sinking)
- Dedicated isolated limit and home switch inputs
- 2 programmable analog inputs (14-bit)
- 1 programmable analog output (10-bit)

- Up to 3-phase 480VAC nominal operation
- Separate 24VDC logic supply
- Four quadrant regenerative operation
- Integrated shunt regulator
- Internal DC bus output for power sharing or regeneration
- Bi-color LED status indicator
- Extensive built-in protection against:
 - over-voltage (programmable)
 - under-voltage (programmable)
 - short-circuit: phase-phase, phase-ground, phase-line, phase-DC bus
 - over-current
 - over-temperature



***Photo for reference only**

BLOCK DIAGRAM:

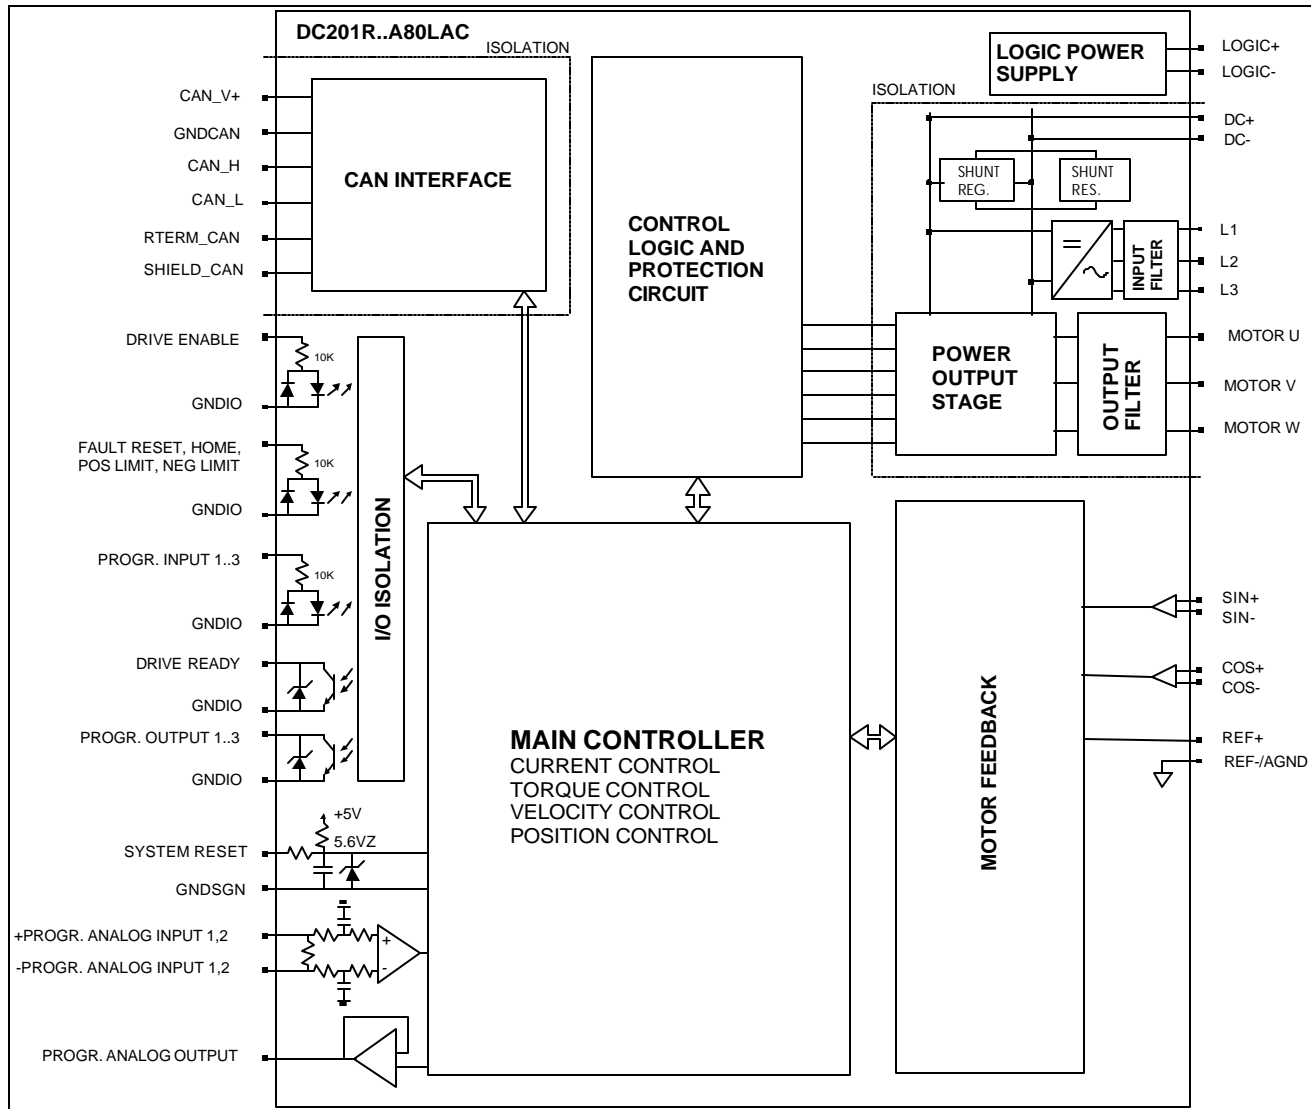

DESCRIPTION:

The DC201R Series digital PWM servo drives are designed to drive brushed and brushless servomotors. These fully digital drives can operate in torque, velocity, or position mode. Various feedback signals can be used to close the velocity and position loop. The command source can be generated internally or can be supplied externally. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

DC201R Series drives feature a single CAN interface which supports the CANopen protocol (DS301 and DSP402). This interface is used for drive configuration and setup as well as online operation in networked applications. Drive commissioning can be accomplished through DigiFlex® DriveWare, a fully graphical Windows© based application.

Torque, velocity, or position commands can be generated from an analog input, a preset index table, or the CAN interface. The DC201R Series also feature an interpolated position mode with cubic interpolation for smooth, coordinated, multi-axis position control via the CAN interface. A homing routine based on the home switch input and/or the encoder index pulse is also implemented.

All drive and motor parameters are stored in non-volatile memory.

SPECIFICATIONS:

POWER STAGE SPECIFICATIONS	DC201R30A80LAC
AC SUPPLY VOLTAGE	0 - 480 VAC, 3-phase, 50 – 60 Hz nominal
DC LOGIC SUPPLY	20...30 VDC, 20W maximum
PEAK CURRENT	30A (21.2 Arms)
MAXIMUM CONTINUOUS CURRENT	15A (10.6 Arms)
MINIMUM LOAD INDUCTANCE	3mH
SWITCHING FREQUENCY	10 kHz
HEATSINK (BASEPLATE) TEMPERATURE RANGE	0 to 65 °C, disables at 65 °C
POWER DISSIPATION AT CONTINUOUS CURRENT	488W
MIN. UNDER-VOLTAGE SHUTDOWN	215 VDC nominal
MAX. OVER-VOLTAGE SHUTDOWN	850 VDC nominal
SHUNT RESISTOR	47 Ohm, 50W
SHUNT SWITCH-ON VOLTAGE	Programmable
SHUNT FUSE	3A Motor Delay @ 250VAC

CAN INTERFACE SUPPLY SPECIFICATIONS	
DC SUPPLY VOLTAGE	7.5 to 13 VDC
INPUT CURRENT	150 mA max.

MECHANICAL SPECIFICATIONS	
LOGIC POWER CONNECTOR: P1	Removable screw terminal
MOTOR POWER CONNECTOR: P2	Removable screw terminal
MAIN POWER CONNECTOR: P3	Removable screw terminal
DC BUS OUTPUT CONNECTOR: P4	Removable screw terminal
MOTOR FEEDBACK CONNECTOR: CN3*	15-pin high density female D-sub
I/O CONNECTOR: CN2*	26-pin high density female D-sub
COMMUNICATIONS INTERFACE (CAN): CN1*	9-pin male D-sub
SIZE	12.99 x 10.08 x 2.48 inches 330 x 256 x 63 mm
WEIGHT	8.8 lbs. 4 kg

* Mating connectors are not included

PIN FUNCTIONS:

P1 – Logic Supply Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
P1	1	LS+	Logic supply input	I
	2	LS-	Logic supply ground	GND

P2 - Motor Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
P2	1	PE	Protective earth ground	PE
	2	Mot C	Motor phase C	O
	3	Mot B	Motor phase B	O
	4	Mot A	Motor phase A	O

P3 – Main Power Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
P3	1	PE	Protective earth ground	PE
	2	L3	Main AC line L3	I
	3	L2	Main AC line L2	I
	4	L1	Main AC line L1	I

P4 – DC Bus Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
P4	1	DC-	Internal DC bus voltage output	PGND
	2	DC-		
	3	DC+		O
	4	DC+		

CN3 - Motor Feedback Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN3	1	SIN+	Resolver sine input, 2Vrms	I
	2	SIN-		I
	3	COS+	Resolver cosine input, 2Vrms	I
	4	COS-		I
	5	GNDSGN	Signal ground	GNDSGN
	6	-	Not connected	
	7	-	Not connected	
	8	-	Not connected	

9	-	Not connected	
10	GND A	Analog ground	GND A
11	REF+	Resolver reference output, 4Vrms, 50mA, 5kHz	O
12	REF- (same as GND A)		O
13	+5V OUT	+5V @ 300mA max. Short-circuit protected.	O
14	MOTOR OVER TEMP	TTL input	I
15	SHIELD	Motor feedback cable shield. Internally connected to GNDSGN	SHLD

CN2 – I/O Connector:


CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN2	1	+24V IN	+24V input pull-up (for sourcing inputs option only)	I
	2	PROG INPUT 1	Programmable digital input. Opto-isolated. See schematic below.	I
	3	PROG INPUT 3		I
	4	FAULT RESET	Fault reset input. Opto-isolated. See schematic below.	I
	5	PROG OUTPUT 2	Programmable digital output. Opto-isolated. See schematic below.	O
	6	-	Reserved	
	7	-PROG ANALOG INPUT 1	See pin 16, 17	I
	8	-PROG ANALOG INPUT 2		I
	9	GNDSGN	Signal ground.	GNDSGN
	10	+24V IN	+24V input pull-up (for sourcing inputs option only)	I
	11	HOME SWITCH	Home switch input. Opto-isolated. See schematic below.	I
	12	PROG INPUT 2	Programmable digital input. Opto-isolated. See schematic below.	I
	13	DRIVE ENABLE	Drive enable input. Opto-isolated. See schematic below.	I
	14	PROG OUTPUT 1	Programmable digital output. Opto-isolated. See schematic below.	O
	15	PROG OUTPUT 3		O
	16	+PROG ANALOG INPUT 1	Programmable analog input. Opto-isolated. See schematic below.	I
	17	+PROG ANALOG INPUT 2		I
	18	SYSTEM RESET	TTL input. Pull to ground to reset drive (same as power cycle). Referenced to GNDSGN.	I
	19	NEGATIVE LIMIT SWITCH	Negative limit switch input. Opto-isolated. See schematic below.	I
	20	POSITIVE LIMIT SWITCH	Positive limit switch input. Opto-isolated. See schematic below.	I
	21	DRIVE READY	Drive ready output. Opto-isolated. See schematic below.	O
	22	GNDIO	Isolated ground	GNDIO

	23	GNDIO	Isolated ground	GNDIO
	24	GNDA	Analog signal ground. Internally connected to GNDSGN	GNDA
	25	PROG ANALOG OUTPUT 1	Programmable analog output. See schematic below.	O
	26	SHIELD	Cable shield. Internally connected to GNDSGN	SHLD

I/O SCHEMATICS:

- Isolated Outputs

DRIVE READY, PROGRAMMABLE OUTPUT 1...3




Active maximum voltage	+0.7 VDC
Active maximum current	200 mA
Inactive maximum voltage	+30 VDC
Inactive maximum current	0.01 mA

- Isolated Inputs


DRIVE ENABLE, FAULT RESET, HOME SWITCH, POSITIVE LIMIT SWITCH, NEGATIVE LIMIT SWITCH, PROGRAMMABLE INPUT 1...3

- Sinking Inputs (standard version)



Active maximum voltage	+30 VDC
Active minimum voltage	+18 VDC
Inactive maximum voltage	+2.5 VDC
Inactive minimum voltage	-5VDC


- Sourcing Inputs (optional -SRC version)



Active maximum voltage	+10VDC
Active minimum voltage	-5VDC


Inactive maximum voltage	+24VIN + 5VDC
Inactive minimum voltage	+24VIN -2.5VDC

- Programmable Analog Output




Voltage Range	-10V...+10V
Resolution	10-bit
Minimum Load Resistance	2K Ohm

- Programmable Analog Inputs



Voltage Range	10V...+10V
Resolution	12-bit

- System Reset Input



CN1 - Communications Interface (CAN):

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN1	2	CAN_L	CAN_L bus line (dominant low)	I
	3	CAN_GND	CAN ground	GND
	5	CAN_SHLD	CAN shield	SHLD
	7	CAN_H	CAN_H bus line (dominant high)	I
	8	CAN_TERM	Termination. Connect to CAN_H for CAN bus termination (120 Ohm)	GND

	9	CAN_V+	CAN external supply 7.5...13 VDC	I
--	---	--------	-------------------------------------	---

DIP SWITCH FUNCTIONS:

- CAN Address Setting


Node-ID	SW1	SW2	SW3	SW4	SW5	SW6
Via CAN	OFF	OFF	OFF	OFF	OFF	OFF
1	ON	OFF	OFF	OFF	OFF	OFF
2	OFF	ON	OFF	OFF	OFF	OFF
3	ON	ON	OFF	OFF	OFF	OFF
...						
63	ON	ON	ON	ON	ON	ON

- CAN Bus Bit Rate Setting

Bit Rate (bits/sec)	SW7	SW8
Via CAN	OFF	OFF
500K	OFF	ON
250K	ON	OFF
125K	ON	ON

- CAN Bus Termination

SW10 can be used for CAN bus termination. Setting SW10 ON will internally connect the CAN_H signal to CAN_L via a 120Ω resistor. This can be used if the drive is the last node in a CAN network. Setting SW10 OFF will open this termination. Note: the CAN_TERM pin can also be used for termination, see below.

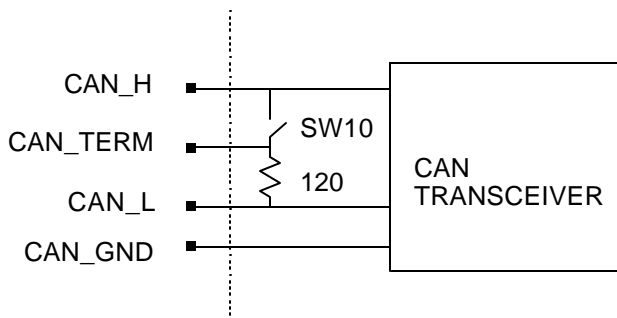

DIGIFLEX® DRIVEWARE:

DigiFlex® DriveWare is a Windows© based application that can be used to setup and configure the DigiFlex® series of digital servo drives via the CAN interface. This application operates with the following PC-to-CAN interfaces:

Manufacturer	Part Number	Style	Manufacturer Contact Information
--------------	-------------	-------	----------------------------------

Advantech	PCL-841	ISA-bus	www.advantech.com
IXXAT	any	any	www.ixxat.com
Kvaser	any	any	www.kvaser.com
Vector	Any	Any	www.vector-cantech.com
ESD Electronics	any	any	www.esd-electronics.com

CANopen OBJECT DICTIONARY:

For more detailed information on CANopen, please visit <http://www.can-cia.org/>, the official web site of CAN in Automation (CiA), the governing body of the CANopen standard.

I. Communication Profile Objects (DS301):

- 1000h: Device_Type
- 1001h: Error_register
- 1002h: Manufacturer_Status_Register
- 1008h: Manufacturer_Device_Name
- 1009h: Manufacturer_Hardware_Version
- 100Ah: Manufacturer_Software_Version
- 100Ch: guard-time
- 100Dh: life-time factor
- 1010h: store_parameters
- 1400h: 1st receive pdo communication parameter
- 1401h: 2nd receive pdo communication parameter
- 1402h: 3rd receive pdo communication parameter
- 1403h: 4th receive pdo communication parameter
- 1404h: 5th receive pdo communication parameter
- 1414h: 21st receive pdo communication parameter
- 1415h: 22nd receive pdo communication parameter
- 1416h: 23rd receive pdo communication parameter
- 1417h: 24th receive pdo communication parameter
- 1600h: 1st receive pdo mapping parameter
- 1601h: 2nd receive pdo mapping parameter
- 1602h: 3rd receive pdo mapping parameter
- 1603h: 4th receive pdo mapping parameter
- 1604h: 5th receive pdo mapping parameter
- 1614h: 21st receive pdo mapping parameter
- 1615h: 22nd receive pdo mapping parameter
- 1616h: 23rd receive pdo mapping parameter
- 1617h: 24th receive pdo mapping parameter
- 1800h: 1st transmit pdo communication parameter
- 1802h: 3rd transmit pdo communication parameter
- 1803h: 4th transmit pdo communication parameter
- 1804h: 5th transmit pdo communication parameter
- 1814h: 21st transmit pdo communication parameter
- 1815h: 22nd transmit pdo communication parameter
- 1816h: 23rd transmit pdo communication parameter
- 1817h: 24th transmit pdo communication parameter
- 1818h: 25th transmit pdo communication parameter
- 1819h: 26th transmit pdo communication parameter
- 1A00h: 1st transmit pdo mapping parameter
- 1A02h: 3rd transmit pdo mapping parameter
- 1A03h: 4th transmit pdo mapping parameter
- 1A04h: 5th transmit pdo mapping parameter
- 1A14h: 21st transmit pdo mapping parameter
- 1A15h: 22nd transmit pdo mapping parameter

- 1A16h: 23rd transmit pdo mapping parameter
- 1A17h: 24th transmit pdo mapping parameter
- 1A18h: 25th transmit pdo mapping parameter
- 1A19h: 26th transmit pdo mapping parameter

II. Drive Profile Objects (DSP402)

- Common Objects
- 6402h: motor_type
- 6403h: motor_catalogue_number
- 6404h: motor_manufacturer
- 6410h: motor_data
- 6510h: drive_data
- 6502h: supported_drive_modes
- 6503h: drive_catalogue_number
- 6504h: drive_manufacturer
- 2001h: user_defined_drive_name
- 2002h: user_units
- 200Eh: active_non_fatal_errors
- 200Fh: error_self_reset
- 2011h: commutation_sensor_selection_code
- 2012h: hall_sensor_parameters
- 201Fh: hall_sensor_error_option_code
- 2031h: hall_sensor_error_counter
- 2032h: hall_sensor_error_counter_limit
- 2013h: encoder_parameters
- 2020h: encoder_counter
- 2021h: encoder_position
- 2022h: encoder_index_counter
- 2027h: encoder_error_option_code
- 2023h: encoder_error_counter
- 2024h: encoder_error_counter_limit
- 2014h: auxiliary_encoder_parameters
- 2028h: auxiliary_encoder_counter
- 2029h: auxiliary_encoder_position
- 202Ah: auxiliary_encoder_index_counter
- 2030h: auxiliary_encoder_error_option_code
- 202Bh: auxiliary_encoder_error_counter
- 202Ch: auxiliary_encoder_error_counter_limit
- 2040h: DIP-switch_settings
- 20A0h: programmable_digital_inputs

20A1h: programmable_digital_outputs
 20A2h : programmable_analog_inputs
 20A3h: programmable_analog_outputs
 20A4h: programmable_digital_inputs_polarity
 20A5h: programmable_digital_inputs_function
 20A8h: programmable_digital_outputs_polarity
 20A9h: programmable_digital_outputs_function
 20ACh : programmable_analog_input_parameters
 20AEh: programmable_analog_output_parameters
 20C2h: power_stage_temperature
 20C8h: communication_control
 208Fh: load_inertia

- Device Control Objects

6040h: controlword
 20C4h: controlword_initial_value
 20C5h: auxiliary_controlword
 6041h: statusword
 605Ah: quick_stop_option_code
 605Bh: shutdown_option_code
 605Ch: disable_operation_option_code
 6060h: modes_of_operation
 6061h: modes_of_operation_display
 2000h: statusword_1
 2004h: dedicated_digital_inputs
 2005h: dedicated_digital_outputs
 2006h: dedicated_digital_inputs_polarity
 2007h: dedicated_digital_outputs_polarity
 2049h: invert_command
 20B0h: trigger_at_value
 20B1h: capture_value
 20B3h: trigger_signal
 20B5h: capture_signal
 20B6h: capture_event
 20C1h: delay_times
 20C3h: motor_overtemperature_option_code

- Factor Group Objects

6090h: velocity_encoder_resolution
 608Fh: position_encoder_resolution
 6093h: position_factor
 6094h: velocity_encoder_factor
 6097h: acceleration_factor
 2079h: analog_torque_command_factor
 207Ah: digital_torque_command_factor
 2081h: analog_velocity_command_factor
 2082h: digital_velocity_command_factor
 2091h: analog_position_command_factor
 2092h: digital_position_command_factor

- Profile Position Mode Objects

607Ah: target_position
 607Dh: software_position_limit

6086h: motion_profile_type
 607Fh: maximum_profile_velocity
 6081h: profile_velocity
 6083h: profile_acceleration
 6084h: profile_deceleration
 6085h: Quick_stop_deceleration

- Homing Mode Objects

607Ch: home_offset
 6098h: homing_method
 6099h: homing_speeds
 609Ah: homing_acceleration

- Position Control Function Objects

6062h: position_demand_value
 6063h: position_actual_value*
 6064h: position_actual_value
 6067h: position_window
 6068h: position_window_time
 6065h: following_error_window
 6066h: following_error_time_out
 60F4h: following_error_actual_value
 60FBh: position_control_parameter_set
 60FCh: position_demand_value*
 2090h: demand_position_offset
 2093h: position_command_low_pass_filter

- Profile Velocity Mode Objects

6069h: velocity_sensor_actual_value
 606Ah: sensor_selection_code
 606Bh: velocity_demand_value
 606Ch: velocity_actual_value
 606Dh: velocity_window
 606Eh: velocity_window_time
 606Fh: velocity_threshold
 6070h: velocity_threshold_time
 60F9h: velocity_control_parameter_set
 60FFh: target_velocity
 2080h: demand_velocity_offset
 2083h: velocity_command_low_pass_filter
 2084h: velocity_error

- Profile Torque Mode Objects

6071h: target_torque
 6072h: max_torque
 6074h: torque_demand_value
 6075h: motorRatedCurrent
 6076h: motorRatedTorque
 6077h: torque_actual_value
 6078h: current_actual_value
 6079h: dc_link_circuit_voltage
 6087h: torque_slope

6088h: torque_profile_type
60F8h: torque_control_parameters
2010h: rated_voltage
2070h: current_control_parameter_set
2074h: target_current_q
2075h: reference_current_q

2077h: reference_torque
2078h: rated_torque_constant
207Bh: Torque command low pass filter

ORDERING INFORMATION:

Standard model: DC201R30A80LACX

With sourcing inputs: DC201R30A80LACX-SRC

X indicates the current revision letter.

MOUNTING DIMENSIONS:

