

DIGIFLEX® DIGITAL SERVO DRIVES MODEL: DR100EE15A20BDC

FEATURES:


- Fully digital, state-of-the-art design
 - Space Vector Modulation and vector control technology
 - 20kHz Digital current loop with programmable gain settings
 - PIDF velocity loop with 100microsecond update rate
 - PID + FF position loop with 100 microsecond update rate
 - Hall sensor + encoder or encoder-only based commutation
 - Surface-mount technology
 - Small size, low cost, ease of use
-
- RS232/485 interface for setup and networking
 - Windows© based setup software with built-in 8-channel digital scope
 - Operates in torque, velocity or position mode with programmable gain settings
 - Programmable profiling in all modes
 - Fully configurable current, voltage, velocity and position limits.
 - Step & direction mode for stepper replacement
 - Encoder following with programmable gear ratio
-
- 4 programmable digital inputs
 - 2 programmable differential inputs, configurable as step & direction, master encoder, or secondary encoder for dual loop operation
 - 4 programmable digital outputs
 - 2 programmable analog inputs (10-bit)
 - 14-bit reference input or programmable analog input
 - 2 programmable analog outputs (10-bit)
 - Encoder output (from motor, optionally buffered)
-
- Four quadrant regenerative operation
 - Separate backup logic supply input
 - Bi-color LED status indicator
 - Extensive built-in protection against:
 - over-voltage (programmable)
 - under-voltage (programmable)
 - short-circuit: phase-phase, phase-ground
 - over-current
 - over-temperature



ADVANCED MOTION CONTROLS

3805 Calle Tecate, Camarillo, CA 93012
Tel: (805) 389-1935, Fax: (805) 389-1165

BLOCK DIAGRAM:

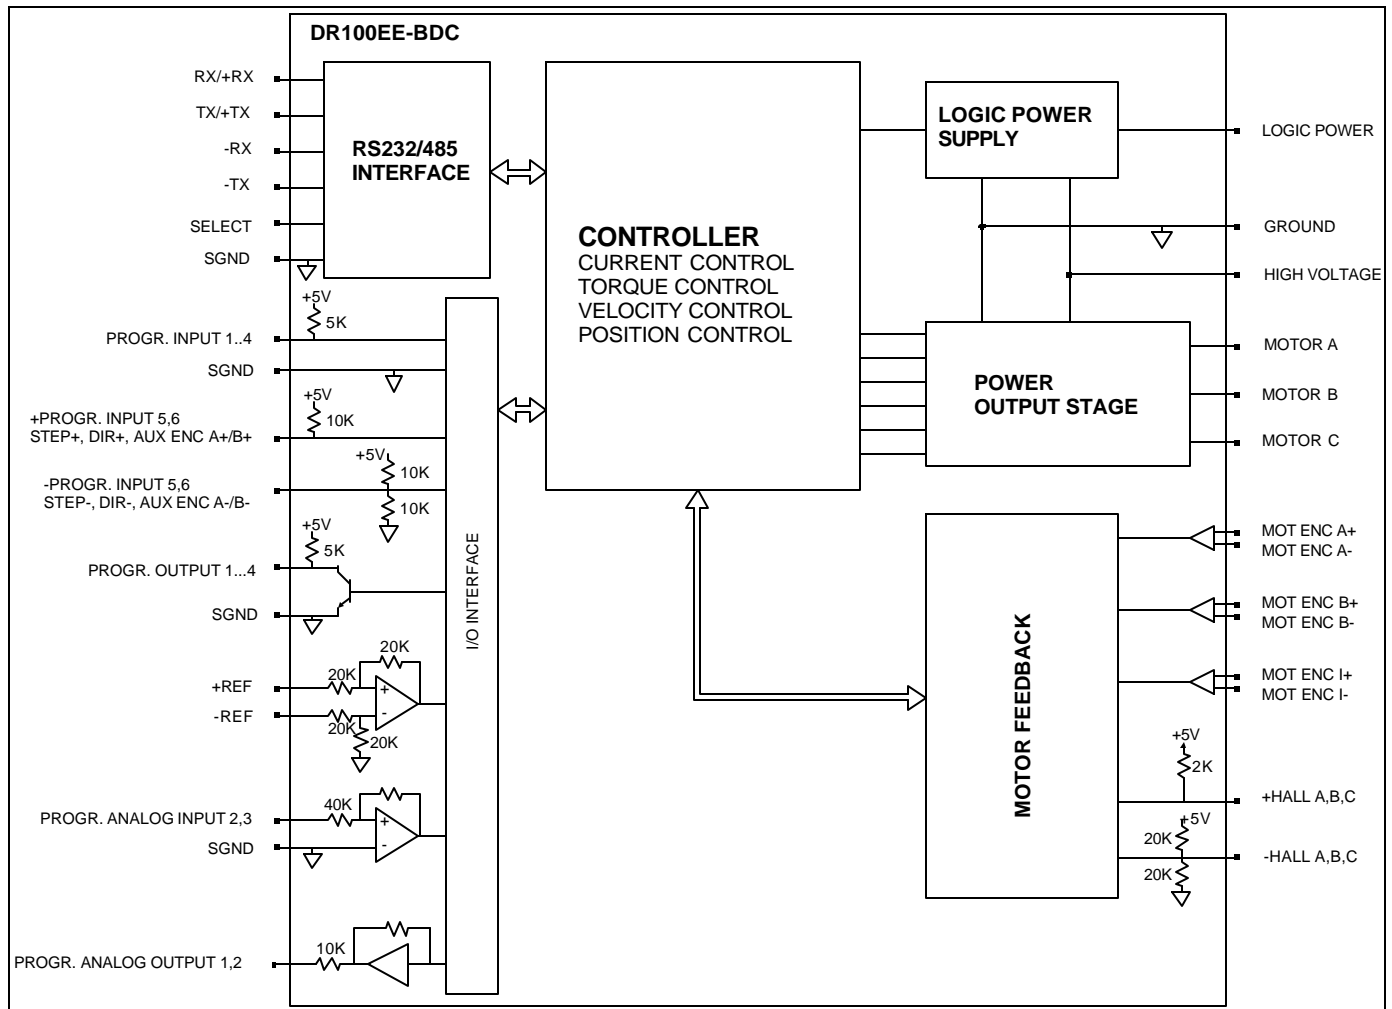

DESCRIPTION:

The DR100EE Series digital PWM servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation. The command source can be generated internally or can be supplied externally. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

DR100EE Series drives feature a single RS232/485 interface, which is used for drive configuration and setup as well as online operation in networked applications. Drive commissioning can be accomplished through a fully graphical Windows® based application.

All drive and motor parameters are stored in non-volatile memory.

SPECIFICATIONS:

| POWER STAGE SPECIFICATIONS | DR100EE15A20BDC |
|---|-------------------------------|
| DC SUPPLY VOLTAGE | 40...190 VDC |
| PEAK CURRENT | 15A (10.6Arms) |
| MAXIMUM CONTINUOUS CURRENT | 10A (5.3Arms) |
| MINIMUM LOAD INDUCTANCE | 250 μ H |
| SWITCHING FREQUENCY | 20 kHz |
| HEATSINK (BASEPLATE) TEMPERATURE RANGE | 0 to 65 °C, disables at 65 °C |
| POWER DISSIPATION AT CONTINUOUS CURRENT | 100W |
| MIN. UNDER VOLTAGE SHUTDOWN | 35 VDC |
| MAX. OVER-VOLTAGE SHUTDOWN | 198 VDC |
| LOGIC SUPPLY VOLTAGE (backup supply) | 30...180 VDC, 20W maximum |

| MECHANICAL SPECIFICATIONS | |
|--|---|
| POWER CONNECTOR: P1 | Plug-in with crimp-terminal |
| MOTOR FEEDBACK CONNECTOR: CN3* | 15-pin high density female D-sub |
| I/O CONNECTOR: CN2* | 26-pin high density female D-sub |
| COMMUNICATIONS INTERFACE (RS232/485): CN1* | 9-pin female D-sub |
| SIZE | 5.22 x 3.52 x 1.42 inches 132.5 x 89.5 x 35.9 mm |
| WEIGHT | 1 lb. 0.44 kg |

* Mating connectors are not included.

PIN FUNCTIONS:

P1 - Motor and Power Connector:

CAUTION: the pin numbering of the mating connector is different from the numbering of the drive connector. In the table below, the second column corresponds to the drive pin numbering (silkscreen). The second to last column corresponds to the mating connector pin numbering.

| DRIVE CONN. | PIN | NAME | DESCRIPTION | I/O | PIN | MATING CONN. |
|-------------|-----|-----------|--|-----|-----|--------------|
| P1 | 1 | MA | Motor phase A | O | 6 | |
| | 2 | MB | Motor phase B | O | 5 | |
| | 3 | MC | Motor phase C | O | 4 | |
| | 4 | HV IN | DC motor and power input. This input is used to supply power to the motor and drive logic circuitry. | I | 3 | |
| | 5 | GND | Ground | GND | 2 | |
| | 6 | LOGIC PWR | Logic supply input. This input can be used to supply power to the drive logic circuitry only. Effective only when the voltage applied to pin P1-4 is lower then the voltage applied to P1-6. | I | 1 | |

CN3 - Motor Feedback Connector:

| CONNECTOR | PIN | NAME | DESCRIPTION | I/O |
|-----------|-----|------------|--|------|
| CN3 | 1 | +Hall A | Commutation sensor inputs. Internal 2K pull-up to +5VDC. Can be used with single ended or differential Hall sensors. | I |
| | 2 | +Hall B | | I |
| | 3 | +Hall C | | I |
| | 4 | MOT ENC A+ | Differential Encoder Input. For single ended encoder signals, leave the A-terminal open. | I |
| | 5 | MOT ENC A- | | I |
| | 6 | MOT ENC B+ | Differential Encoder Input. For single ended encoder signals, leave the B-terminal open. | I |
| | 7 | MOT ENC B- | | I |
| | 8 | MOT ENC I+ | Differential Encoder Input. For single ended encoder signals, leave the I-terminal open. | I |
| | 9 | MOT ENC I- | | I |
| | 10 | -Hall A* | See CN3-1. Leave open in case of single ended Hall sensors. | I |
| | 11 | -Hall B* | See CN3-2. Leave open in case of single ended Hall sensors. | I |
| | 12 | SGND | Signal ground | SGND |
| | 13 | +5V OUT | +5V @ 250mA max. Short-circuit protected. | O |
| | 14 | PAI3 | Programmable analog input, single ended, 10-bit | I |
| | 15 | -Hall C* | See CN3-3. Leave open in case of single ended Hall sensors. | I |

* Contact factory for SE compatible options.

CN2 – I/O Connector:

| CONNECTOR | PIN | NAME | DESCRIPTION | I/O |
|-----------|-----|--------------------|--|------|
| CN2 | 1 | PDO1* | Programmable digital output | O |
| | 2 | SGND | Signal ground | SGND |
| | 3 | PDO2* | Programmable digital output | O |
| | 4 | +REF | Differential reference signal input, 14-bit resolution. Can also be used as programmable analog input 1. | I |
| | 5 | -REF | | I |
| | 6 | PAI2 | Programmable analog input | I |
| | 7 | PAO1 | Programmable analog output | O |
| | 8 | PAO2 | Programmable analog output | O |
| | 9 | -PDI6 | Programmable Input (see CN2-18) or Direction- or Aux Enc B- | I |
| | 10 | PDO3 | Programmable digital output | O |
| | 11 | PDI1 | Programmable digital input | I |
| | 12 | PDI2 | Programmable digital input | I |
| | 13 | PDI3 | Programmable digital input | I |
| | 14 | PDO4 | Programmable digital output | O |
| | 15 | +5V OUT | +5VDC. Note: the total current on CN2-15 and CN3-13 combined should not exceed 250 mA | O |
| | 16 | SGND | Signal ground | SGND |
| | 17 | +PDI5 | Programmable differential digital input, or Step+ or Aux Enc A+ | I |
| | 18 | +PDI6 | Programmable, differential digital input or Direction+ or Aux Enc B+ | I |
| | 19 | PDI4 | Programmable digital input | I |
| | 20 | Encoder Channel A+ | Encoder Output (from connector CN3), not buffered | O |
| | 21 | Encoder Channel A- | | O |
| | 22 | Encoder Channel B+ | Encoder Output (from connector CN3), not buffered | O |
| | 23 | Encoder Channel B- | | O |
| | 24 | Encoder Channel I+ | Encoder Output (from connector CN3), not buffered | O |
| | 25 | Encoder Channel I- | | O |
| | 26 | -PDI5 | Programmable Input (See CN2-17) or Step- or Aux Enc A- | I |

* Contact factory for SE compatible options.

CN1 - Communications Interface (RS232/485):

| CONNECTOR | PIN | NAME | DESCRIPTION | I/O |
|-----------|-----|--------|--|-----|
| CN1 | 1 | SELECT | RS232/485 selection. Pull to ground (CN1-5) for RS485. | I |
| | 2 | TX/+TX | RS232: Transmit; RS485: +TX | O |
| | 3 | RX/+RX | RS232: Receive; RS485: +RX | I |

| | | | | |
|--|---|------|---------------|------|
| | 4 | N/C | Not connected | |
| | 5 | SGND | Signal ground | SGND |
| | 6 | -TX | RS485: -TX | O |
| | 7 | N/C | Not connected | |
| | 8 | -RX | RS485: -RX | I |
| | 9 | N/C | Not connected | |

ORDERING INFORMATION:

Standard model: DR100EE15A20BDCX

X indicates the current revision letter.

