

DIGIFLEX® DIGITAL SERVO DRIVES MODEL: DR101EE25A20NAC

FEATURES:

- Fully digital, state-of-the-art design
- Space Vector Modulation and vector control technology
- 20kHz Digital current loop with programmable gain settings
- PIDF velocity loop with 100microsecond update rate
- PID + FF position loop with 100 microsecond update rate
- Hall sensor + encoder or encoder-only based commutation
- Surface-mount technology
- Small size, low cost, ease of use

- Isolated RS232/485 interface for setup and networking
- Windows© based setup software with built-in 8-channel digital scope
- Operates in torque, velocity or position mode with programmable gain settings
- Programmable profiling in all modes
- Fully configurable current, voltage, velocity and position limits.
- Step & direction mode for stepper replacement
- Encoder following with programmable gear ratio

- 4 isolated programmable digital inputs
- 2 programmable differential inputs, configurable as step & direction, master encoder, or secondary encoder for dual loop operation
- 4 isolated programmable digital outputs
- 2 programmable analog inputs (10-bit)
- 14-bit reference input or programmable analog input
- 1 programmable analog output (10-bit)
- Encoder output (from motor, optionally buffered)


- 120VAC off-line operation
- Four quadrant regenerative operation
- Integrated shunt regulator and resistor
- Bi-color LED status indicator
- Extensive built-in protection against:
 - over-voltage (programmable)
 - under-voltage (programmable)
 - short-circuit: phase-phase, phase-ground
 - over-current
 - over-temperature



ADVANCED MOTION CONTROLS

3805 Calle Tecate, Camarillo, CA 93012
Tel: (805) 389-1935, Fax: (805) 389-1165

BLOCK DIAGRAM:

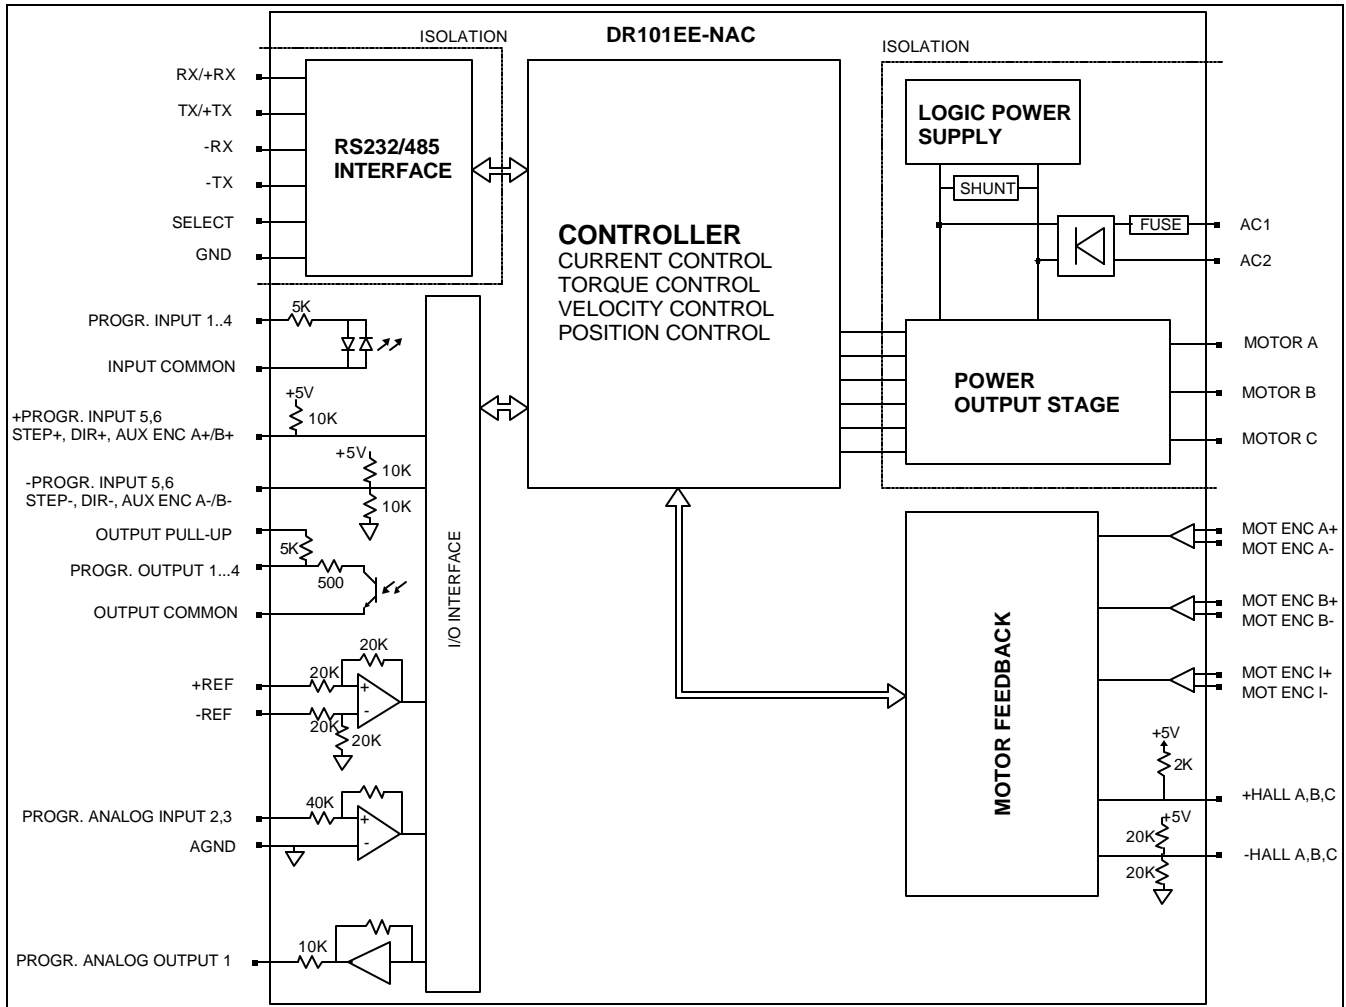

DESCRIPTION:

The DR101EE Series digital PWM servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation. The command source can be generated internally or can be supplied externally. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

DR101EE Series drives feature a single, isolated RS232/485 interface, which is used for drive configuration and setup as well as online operation in networked applications. Drive commissioning can be accomplished through a fully graphical Windows© based application.

All drive and motor parameters are stored in non-volatile memory.

SPECIFICATIONS:

POWER STAGE SPECIFICATIONS	DR101EE25A20NAC
AC SUPPLY VOLTAGE	45 – 125 VAC, single phase, 50 – 60 Hz
PEAK CURRENT	25A (17.6Arms)
MAXIMUM CONTINUOUS CURRENT	12.5A (8.8Arms)
MINIMUM LOAD INDUCTANCE	300 μ H
SWITCHING FREQUENCY	20 kHz
HEATSINK (BASEPLATE) TEMPERATURE RANGE	0 to 65 °C, disables at 65 °C
POWER DISSIPATION AT CONTINUOUS CURRENT	150W
MIN. UNDER-VOLTAGE SHUTDOWN	60 VDC
MAX. OVER-VOLTAGE SHUTDOWN	205 VDC
BUS CAPACITANCE	3000 μ F
SHUNT RESISTOR	10 Ω @ 50W
SHUNT SWITCH-ON VOLTAGE	Programmable
SHUNT FUSE	3A Motor Delay @ 250VAC
BUS FUSE	15A Slow-Blow @ 250 VAC

MECHANICAL SPECIFICATIONS	
POWER CONNECTOR: P1	Removable screw terminal
MOTOR FEEDBACK CONNECTOR: CN3*	15-pin high density female D-sub
I/O CONNECTOR: CN2*	26-pin high density female D-sub
COMMUNICATIONS INTERFACE (RS232/485): CN1*	9-pin female D-sub
SIZE	7.42 x 5.92 x 2.58 188.5x 150.4 x 65.5 mm
WEIGHT	

* Mating connectors not included.

PIN FUNCTIONS:

P1 - Motor and Power Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
P1	1	MA	Motor phase A	O
	2	MB	Motor phase B	O
	3	MC	Motor phase C	O
	4	AC2	AC supply input	I
	5	AC1		I

CN3 - Motor Feedback Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN3	1	+Hall A	Commutation sensor inputs. Internal 2K pull-up to +5VDC. Can be used with single ended or differential Hall sensors.	I
	2	+Hall B		I
	3	+Hall C		I
	4	MOT ENC A+	Differential Encoder Input. For single ended encoder signals, leave the A-terminal open.	I
	5	MOT ENC A-		I
	6	MOT ENC B+	Differential Encoder Input. For single ended encoder signals, leave the B-terminal open.	I
	7	MOT ENC B-		I
	8	MOT ENC I+	Differential Encoder Input. For single ended encoder signals, leave the I-terminal open.	I
	9	MOT ENC I-		I
	10	-Hall A*	See CN3-1. Leave open in case of single ended Hall sensors.	I
	11	-Hall B*	See CN3-2. Leave open in case of single ended Hall sensors.	I
	12	SGND	Signal ground	SGND
	13	+5V OUT	+5V @ 250mA max. Short-circuit protected.	O
	14	PAI3	Programmable analog input, single ended, 10-bit	I
	15	-Hall C*	See CN3-3. Leave open in case of single ended Hall sensors.	I

CN2 – I/O Connector:

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN2	1	PDO1	Isolated programmable digital output, 24V @ 50mA max. Referenced to pin 8, Output Common.	O
	2	OUTPUT COMMON	Digital output common.	OGND
	3	PDO2	Isolated programmable digital output, 24V @ 50mA max. Referenced to pin 8, Output Common.	O

4	+REF	Differential reference signal input, 14-bit resolution. Can also be used as programmable analog input 1.	I
5	-REF		I
6	PAI2	Programmable analog input	I
7	PAO1	Programmable analog output	O
8	OUTPUT PULL-UP	Digital output pull-up via 5K resistor.	I
9	-PDI6	Programmable Input (see CN2-18) or Direction- or Aux Enc B-	I
10	PDO3	Isolated programmable digital output, 24V @ 50mA max. Referenced to pin 8, Output Common.	O
11	PDI1	Isolated programmable digital input, 24V @ 5mA max. Referenced to pin 15, Input Common.	I
12	PDI2	Isolated programmable digital input, 24V @ 5mA max. Referenced to pin 15, Input Common.	I
13	PDI3	Isolated programmable digital input, 24V @ 5mA max. Referenced to pin 15, Input Common.	I
14	PDO4	Isolated programmable digital output, 24V @ 50mA max. Referenced to pin 8, Output Common.	O
15	Input Common	Digital input common. Can also be used to pull-up digital inputs.	IGND
16	AGND	Analog ground	AGND
17	+PDI5	Programmable differential digital input, or Step+ or Aux Enc A+	I
18	+PDI6	Programmable, differential digital input or Direction+ or Aux Enc B+	I
19	PDI4	Isolated programmable digital input, 24V @ 5mA max. Referenced to pin 15, Input Common.	I
20	Encoder Channel A+	Encoder Output (from connector CN3), not buffered	O
21	Encoder Channel A-		O
22	Encoder Channel B+	Encoder Output (from connector CN3), not buffered	O
23	Encoder Channel B-		O
24	Encoder Channel I+	Encoder Output (from connector CN3), not buffered	O
25	Encoder Channel I-		O
26	-PDI5	Programmable Input (See CN2-17) or Step- or Aux Enc A-	I

CN1 - Communications Interface (RS232/485):

CONNECTOR	PIN	NAME	DESCRIPTION	I/O
CN1	1	SELECT	RS232/485 selection. Pull to ground (CN1-5) for RS485.	I
	2	TX/+TX	RS232: Transmit; RS485: +TX	O

	3	RX/+RX	RS232: Receive; RS485: +RX	I
	4	N/C	Not connected	
	5	SGND	Signal ground	SGND
	6	-TX	RS485: -TX	O
	7	N/C	Not connected	
	8	-RX	RS485: -RX	I
	9	N/C	Not connected	

ORDERING INFORMATION:

Standard model: DR101EE25A20NACX

X indicates the current revision letter.

MOUNTING DIMENSIONS:

